



# Technical data sheet



60



Mold, Bass & Power dome  
Open dome

	Oticon Opn 1	Oticon Opn 2	Oticon Opn 3
<b>Speech Understanding</b>			
OpenSound Navigator™	Level 1	Level 2	Level 3
- Balancing power effect	100%	50%	50%
- Max. noise removal	9 dB	5 dB	3 dB
Speech Guard™ LX	Level 1	Level 2	Level 3
Spatial Sound™ LX	4 estimators	2 estimators	2 estimators
Soft Speech Booster LX	•	•	•
Speech Rescue™ LX	•	•	•
<b>Sound Quality</b>			
Clear Dynamics	•	•	-
Binaural Noise Management	•	•	-
Fitting Bandwidth*	10 KHz	8 KHz	8 KHz
Processing Channels	64	48	48
Bass Boost (streaming)	•	•	•
<b>Listening Comfort</b>			
Transient Noise Management	4 configurations	On/Off	On/Off
Feedback shield LX	•	•	•
Wind Noise Management	•	•	•
YouMatic™ LX	3 configurations	2 configurations	1 configuration
<b>Personalization &amp; Optimizing Fitting</b>			
Fitting Bands	16	14	12
Multiple Directionality Options	•	•	•
Adaptation Management	•	•	•
Oticon Firmware Updater	•	•	•
Fitting Formulas	VAC+, NAL-NL1 + 2, DSL v5.0	VAC+, NAL-NL1 + 2, DSL v5.0	VAC+, NAL-NL1 + 2, DSL v5.0
<b>Connecting to the World</b>			
Stereo streaming (2.4 GHz)	•	•	•
Oticon ON App	•	•	•
ConnectClip	•	•	•
Remote Control 3.0	•	•	•
TV Adapter 3.0	•	•	•
Tinnitus SoundSupport™	•	•	•
Expected battery life, hours**	60-65	60-65	60-65

\* Bandwidth accessible for gain adjustments during fitting

\*\* Battery size 312 - IEC PR41.

Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels, incl. direct stereo streaming from a TV (25% of the time) and streaming from a mobile phone (6% of the time).

OTICON | Opn

miniRITE 60  
miniRITE-T 60

Oticon Opn™ miniRITE is a discreet design with a smart single push button.

Oticon Opn miniRITE-T is a discreet style based on the popular miniRITE. It features a telecoil and a convenient double push button for easy operation of the volume and program controls.

OpenSound Navigator™ provides better speech understanding by continuously analyzing the environment, balancing all sound sources and attenuating the dominating noise.

TwinLink™ wireless technology combines binaural communication and 2.4 GHz connectivity in stereo directly to external digital devices with very low power consumption.

Fully programmable with updatable firmware, the Velox™ platform is ready for the future.

Oticon Opn is a Made for iPhone® hearing aid.

Oticon Opn is built on the new Velox platform, providing frequency resolution in 64 channels (Opn 1).

TwinLink  
NFMI + 2.4 GHz

Made for

IP68

Oticon Opn is compatible with iPhone 7 Plus, iPhone 7, iPhone SE, iPhone 6s, iPhone 6s Plus, iPhone 6, iPhone 6 Plus, iPhone 5, iPhone 5s, iPhone 5c, iPhone 5, 9.7-inch iPad Pro, 12.9-inch iPad Pro, iPad Air 2, iPad Air, iPad (4th generation), iPad mini 4, iPad mini 3, iPad mini 2, iPad mini, and iPod touch (5th and 6th generation). Devices must be running iOS 9.3 or later. Please visit [www.oticon.com](http://www.oticon.com) for more details on compatibility.




**oticon**  
PEOPLE FIRST

Technical data			Ear Simulator			2CC Coupler		
			IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010			ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006		
Oticon Opn miniRITE/miniRITE-T			Opn 1	Opn 2	Opn 3	Opn 1	Opn 2	Opn 3
Frequency range Hz			110-9700	110-7500	110-7500	100-9200	100-7500	100-7500
OSPL90	Peak			116 dB SPL			105 dB SPL	
	1600 Hz			109 dB SPL			100 dB SPL	
	HFA-OSPL90			110 dB SPL			102 dB SPL	
Full-on gain*	Peak			46 dB			35 dB	
	1600 Hz			37 dB			29 dB	
	HFA-FOG			38 dB			30 dB	
Reference test gain				30 dB			26 dB	
Telecoil output (1600 Hz) (miniRITE-T)	1 mA/m field			67 dB SPL			-	
	10 mA/m field			87 dB SPL			-	
	SPLITS L/R			-			85/85 dB SPL	
Total harmonic distortion (Input 70 dB SPL)	500 Hz			<2 %			<2 %	
	800 Hz			<3 %			<2 %	
	1600 Hz			<2 %			<2 %	
Equivalent input noise level	Omni (dB SPL)	21	22	22	18	19	19	
	Dir (dB SPL)	28	30	30	27	28	28	
Battery consumption**	Typical			1.5 mA			1.6 mA	
	Quiescent			1.5 mA			1.5 mA	
Battery life, artificial measurement, hours***				120			115	
IRIL (IEC 60118-13:2011) miniRITE				800/1400/2000 MHz: 21/<2/<2 dB SPL				
IRIL (IEC 60118-13:2016) miniRITE-T				700/1400/2000 MHz: 16/21/26 dB SPL				

\* Measured with the gain control of the hearing aid set to its full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0+A1:1994 but without influence of feedback.

\*\* Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of a minimum of 3 minutes.

\*\*\* Based on the standardized battery consumption measurement (IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

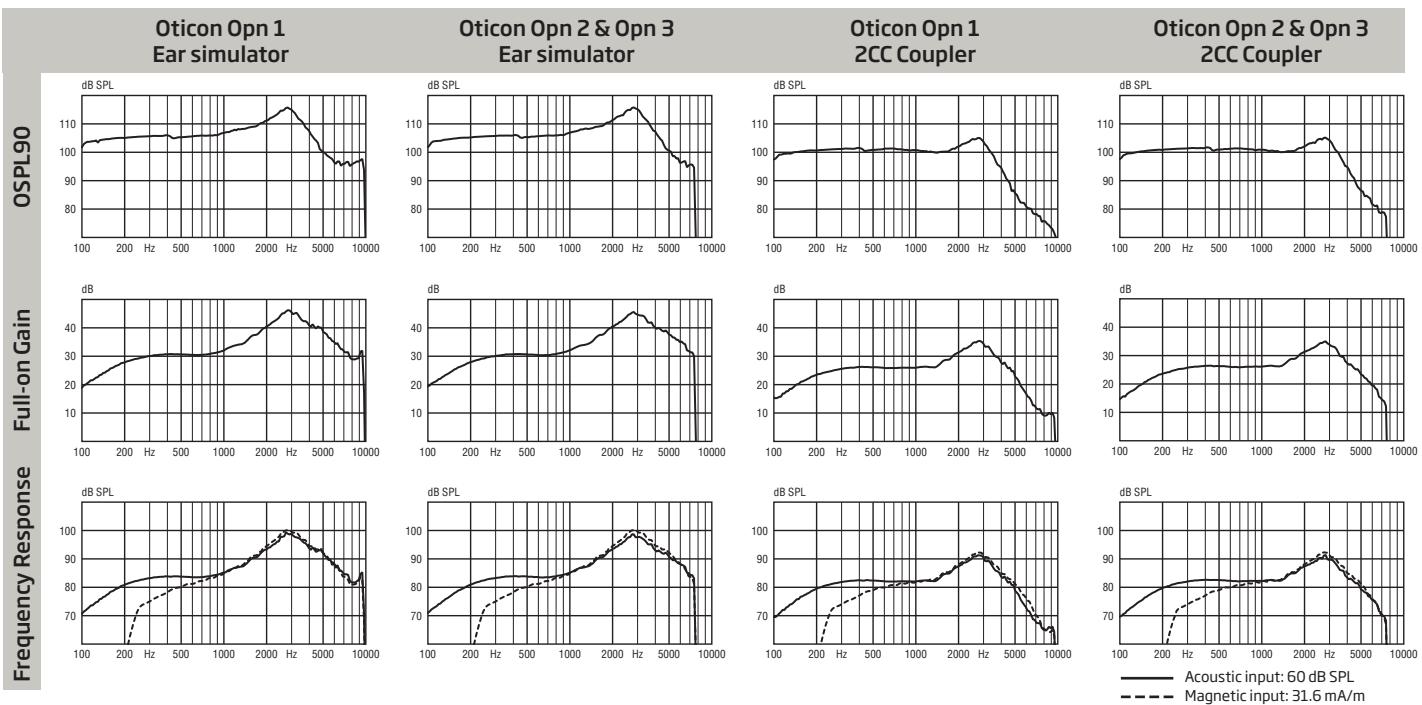

**Technical information:** Omnidirectional mode is used unless otherwise stated.

#### Operating conditions

Temperature: +1°C to +40°C

#### Relative humidity:

5% to 93%, non-condensing

#### Storage and transportation conditions

Temperature and humidity should not exceed the following limits for extended periods during transportation and storage.

Temperature: -25°C to +60°C

Relative humidity: 5% to 93%, non-condensing



Absolute Hearing Solutions LLC  
absolutehearing@att.net

750 Cross Pointe Road Suite F  
Gahanna, Ohio 43230

Phone: 614-452-4280  
Toll Free: 866-603-2159  
Fax: 614-577-0481  
www.absolutesolutions.com